

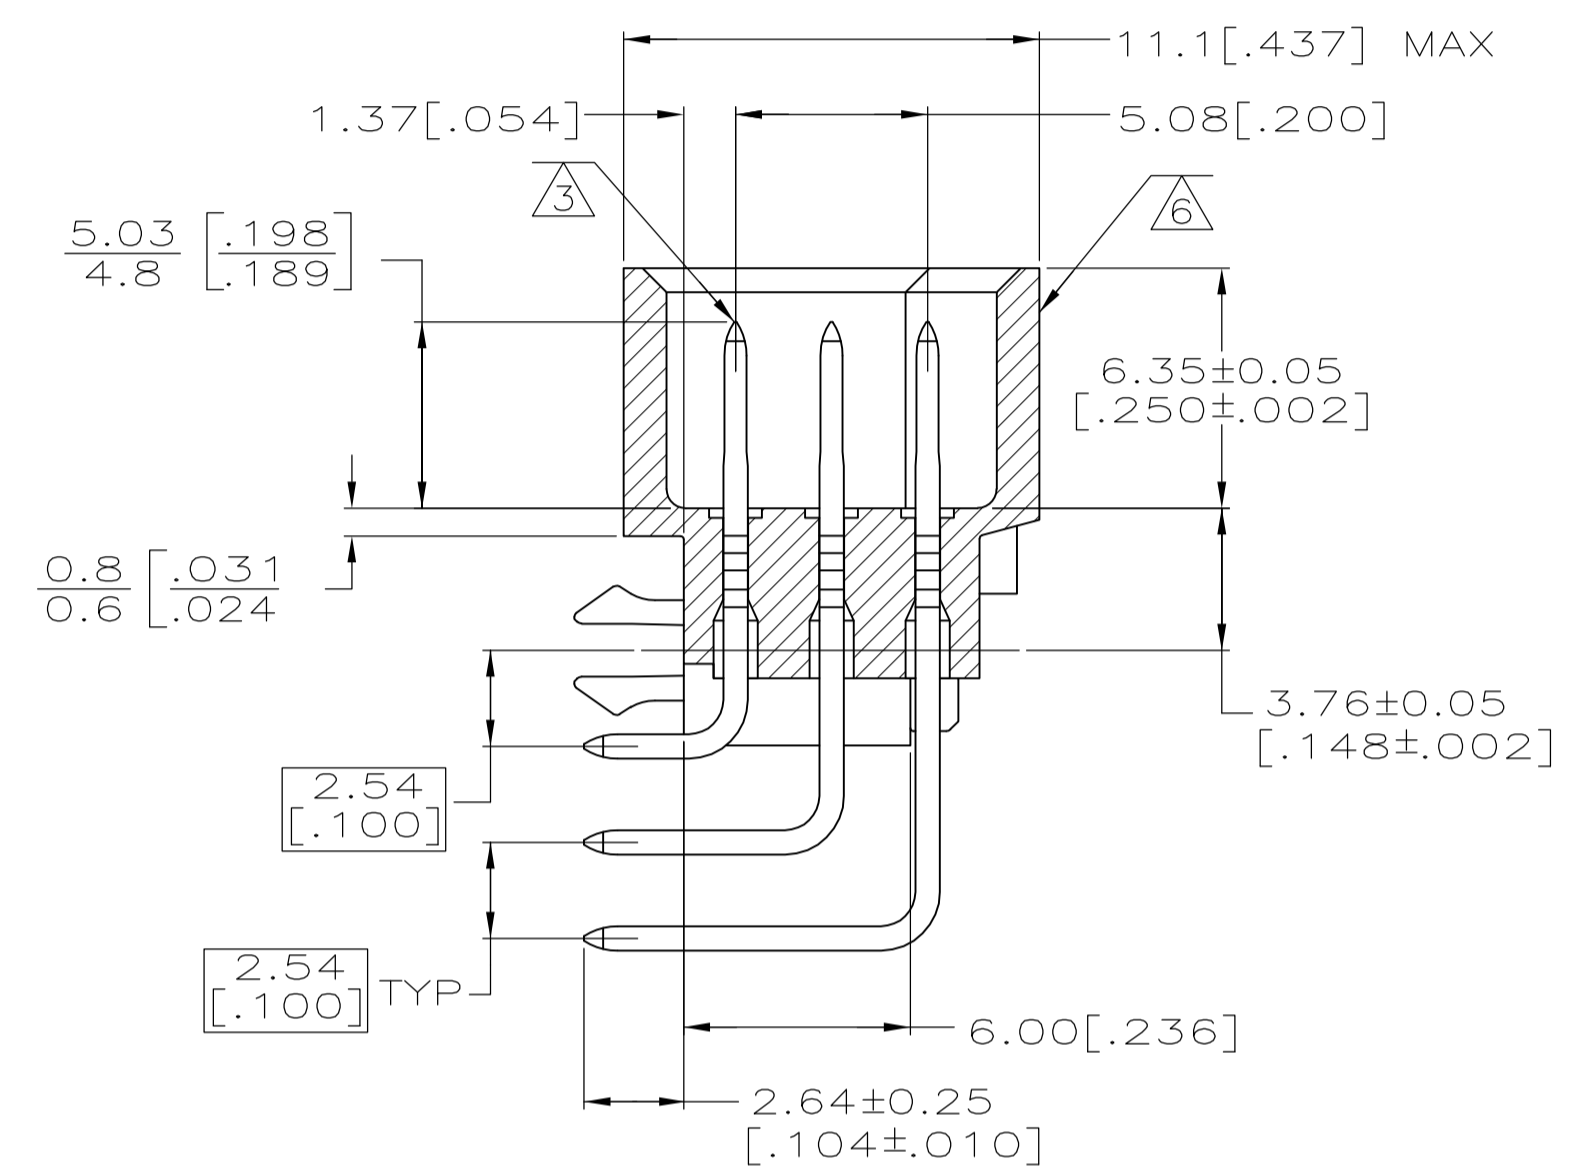
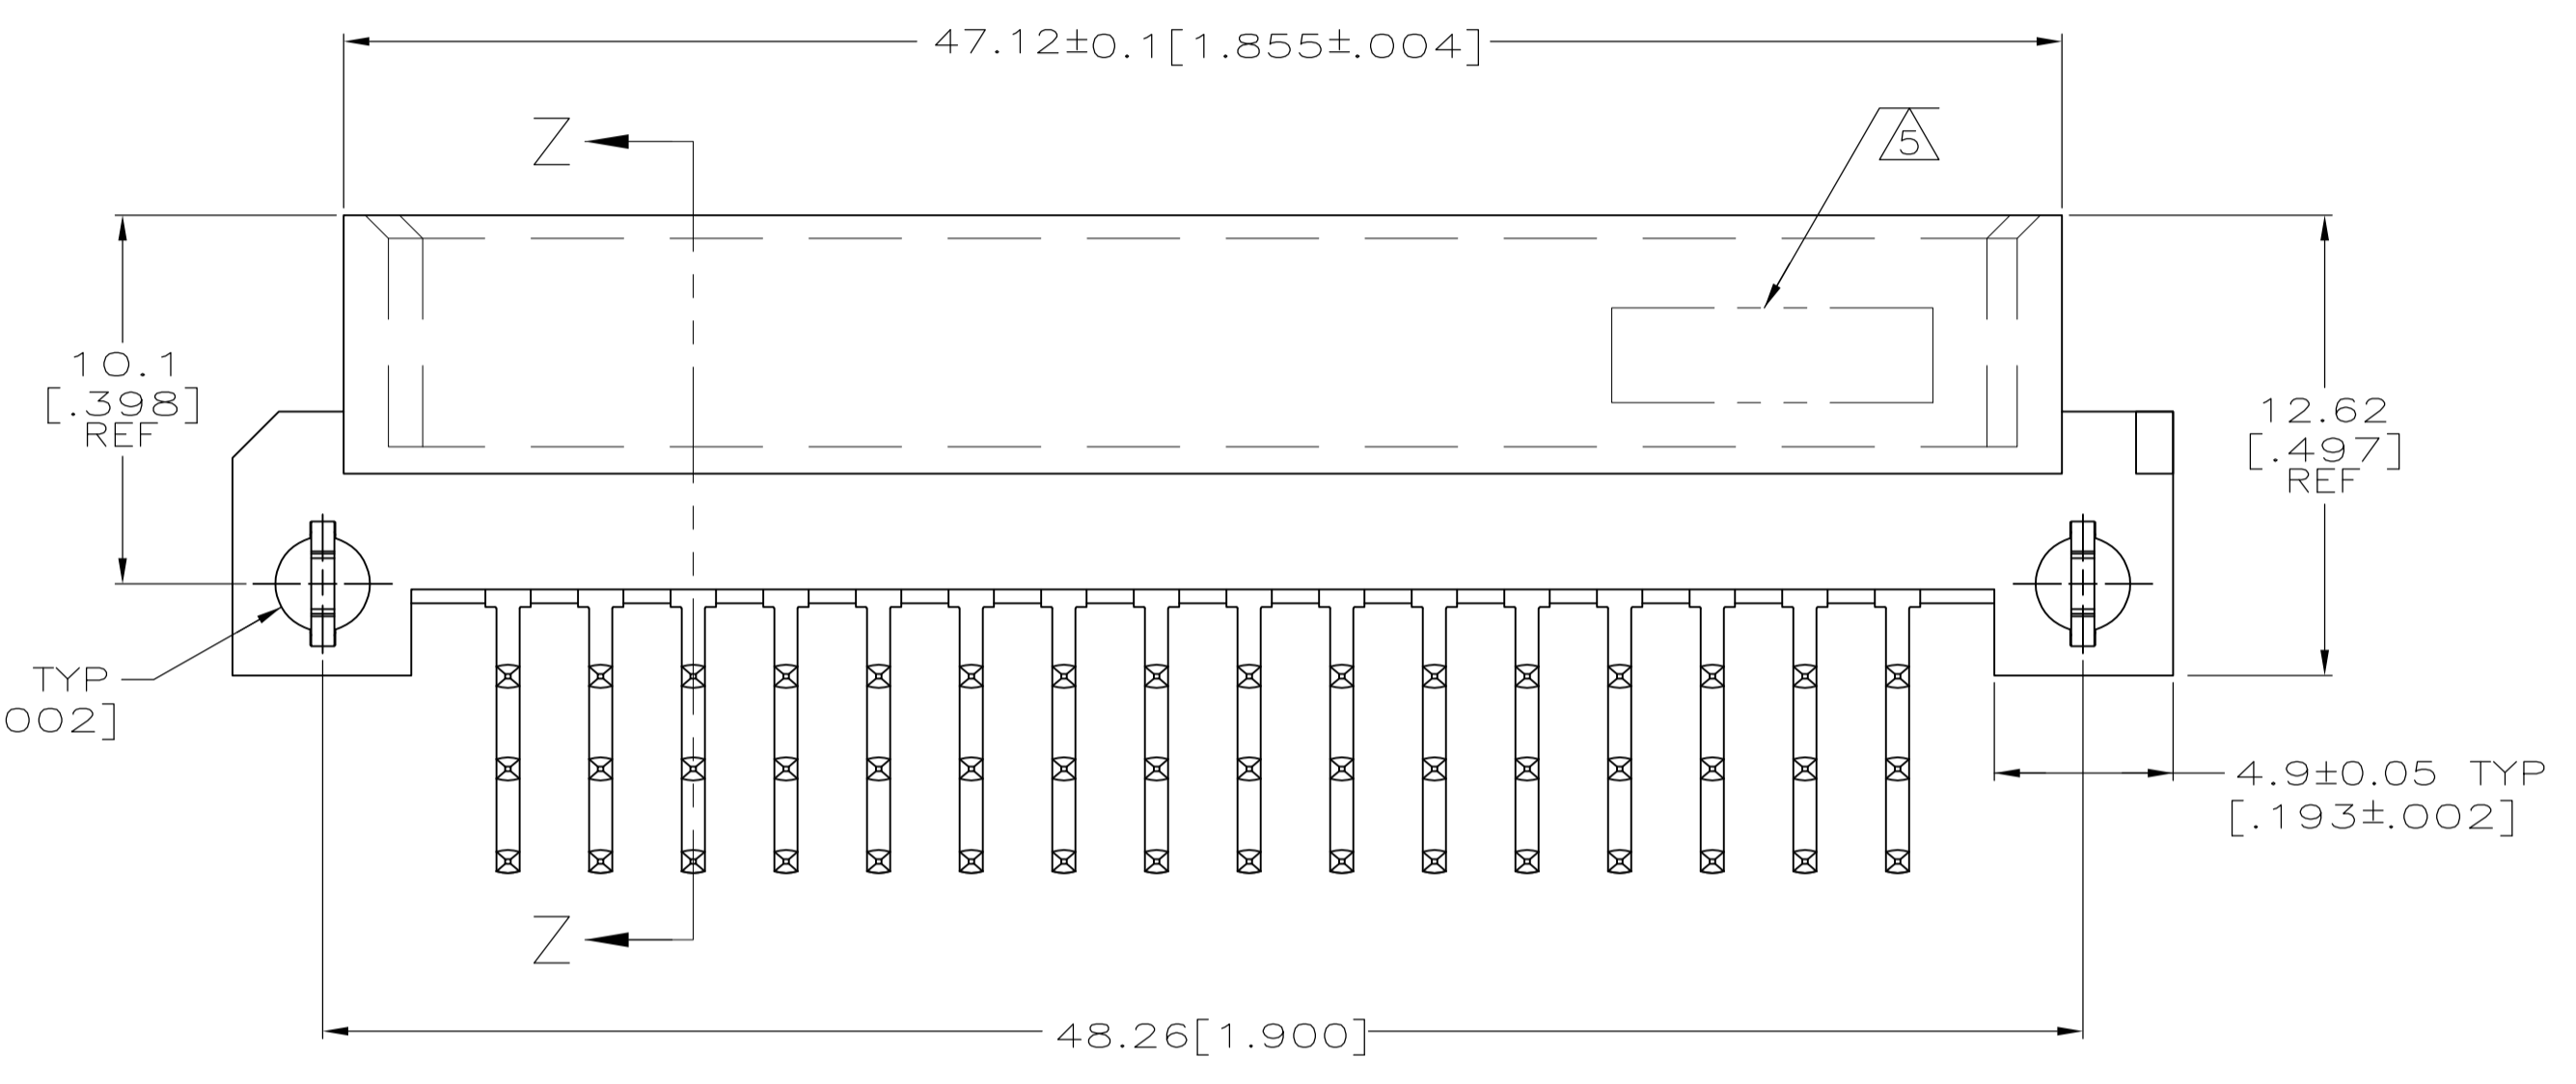


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑤ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- ⑥ MARKING ON THIS SIDE.

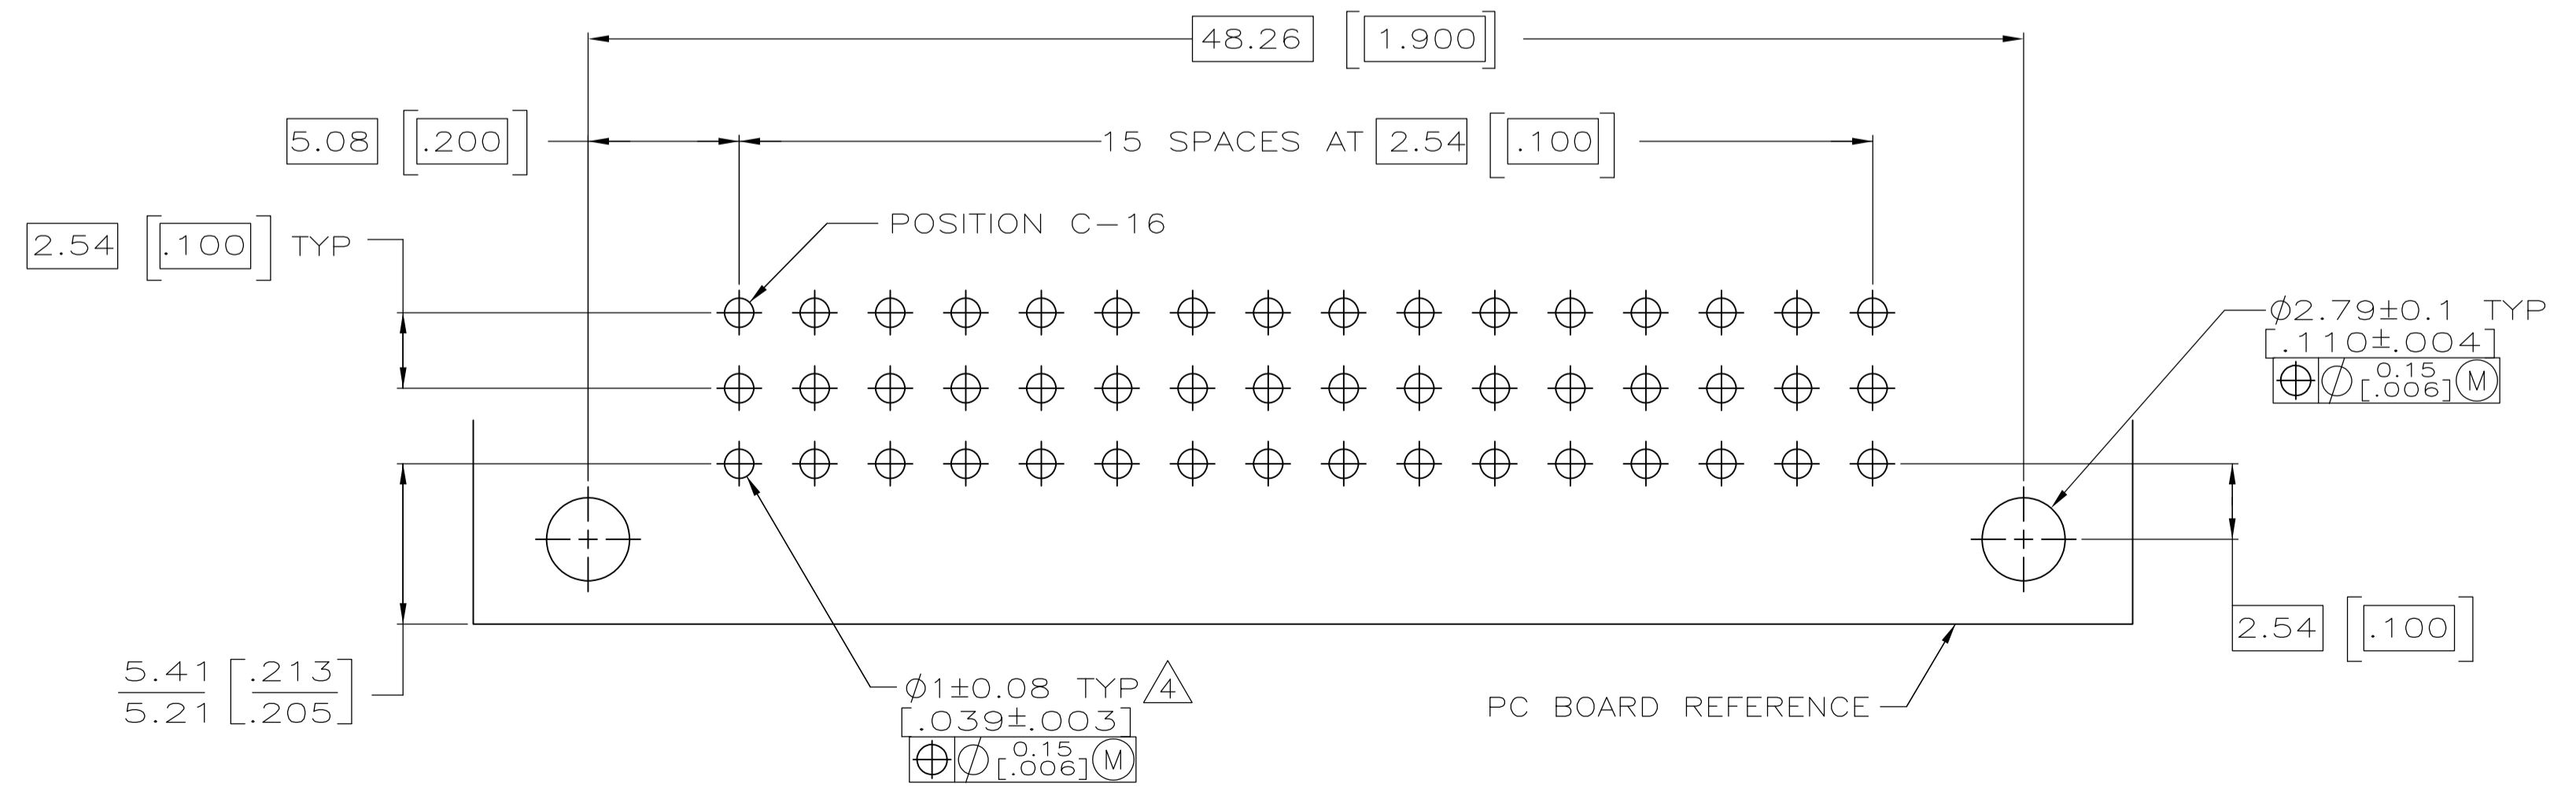

SECTION Z-Z

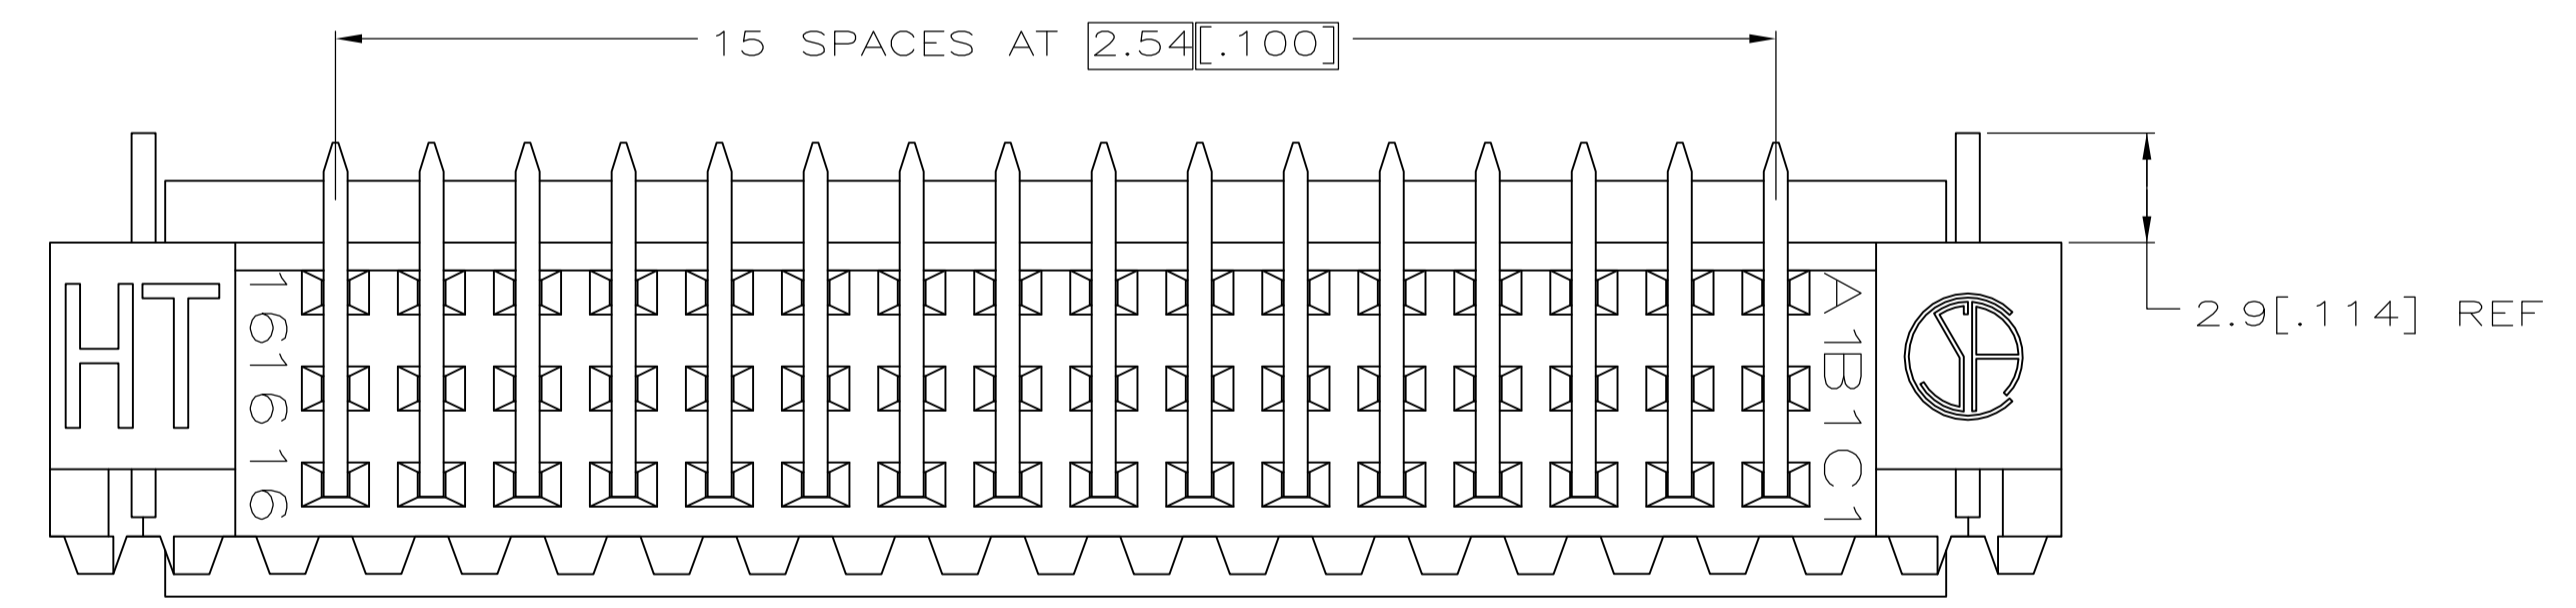

PC BOARD LAYOUT
 RECOMMENDED PC BOARD THICKNESS 1.57[.062]

5148020-5
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE	OSMAYOS	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CIK A. SHARPE	OSMAYOS	NAME ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, 2.64[.104] SOLDER POST WITH BOARD-LOCKS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE	OSMAYOS	APPLICATION SPEC	
0 PLC	± -	SIZE		RESTRICTED TO	
1 PLC	± -	CAGE CODE		DRAWING NO	
2 PLC	± -	WEIGHT		A1 00779 C=5148020	
3 PLC	± 0.13[.005]	CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV 01	
4 PLC	± -				
ANGLES	± -				
MATERIAL	FINISH				