


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS
    - 1.1 FREQUENCY RANGE: DC to 12.4 GHz
    - 1.2 MAXIMUM INPUT POWER:
      - AT +25°C: 2 WATTS
      - AT +125°C: 0.5 WATTS
    - 1.3 OPERATING TEMPERATURE RANGE:
      - 55°C to +125°C
    - 1.4 IMPEDANCE: 50 OHMS
    - 1.5 MAXIMUM VSWR:
      - DC to 4.0 GHz: 1.07:1
      - 4.0 to 12.4 GHz: 1.12:1
  - 2.0 MARK UNIT AS SHOWN.  
(REF.: INK-02611-27-12)
  - 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

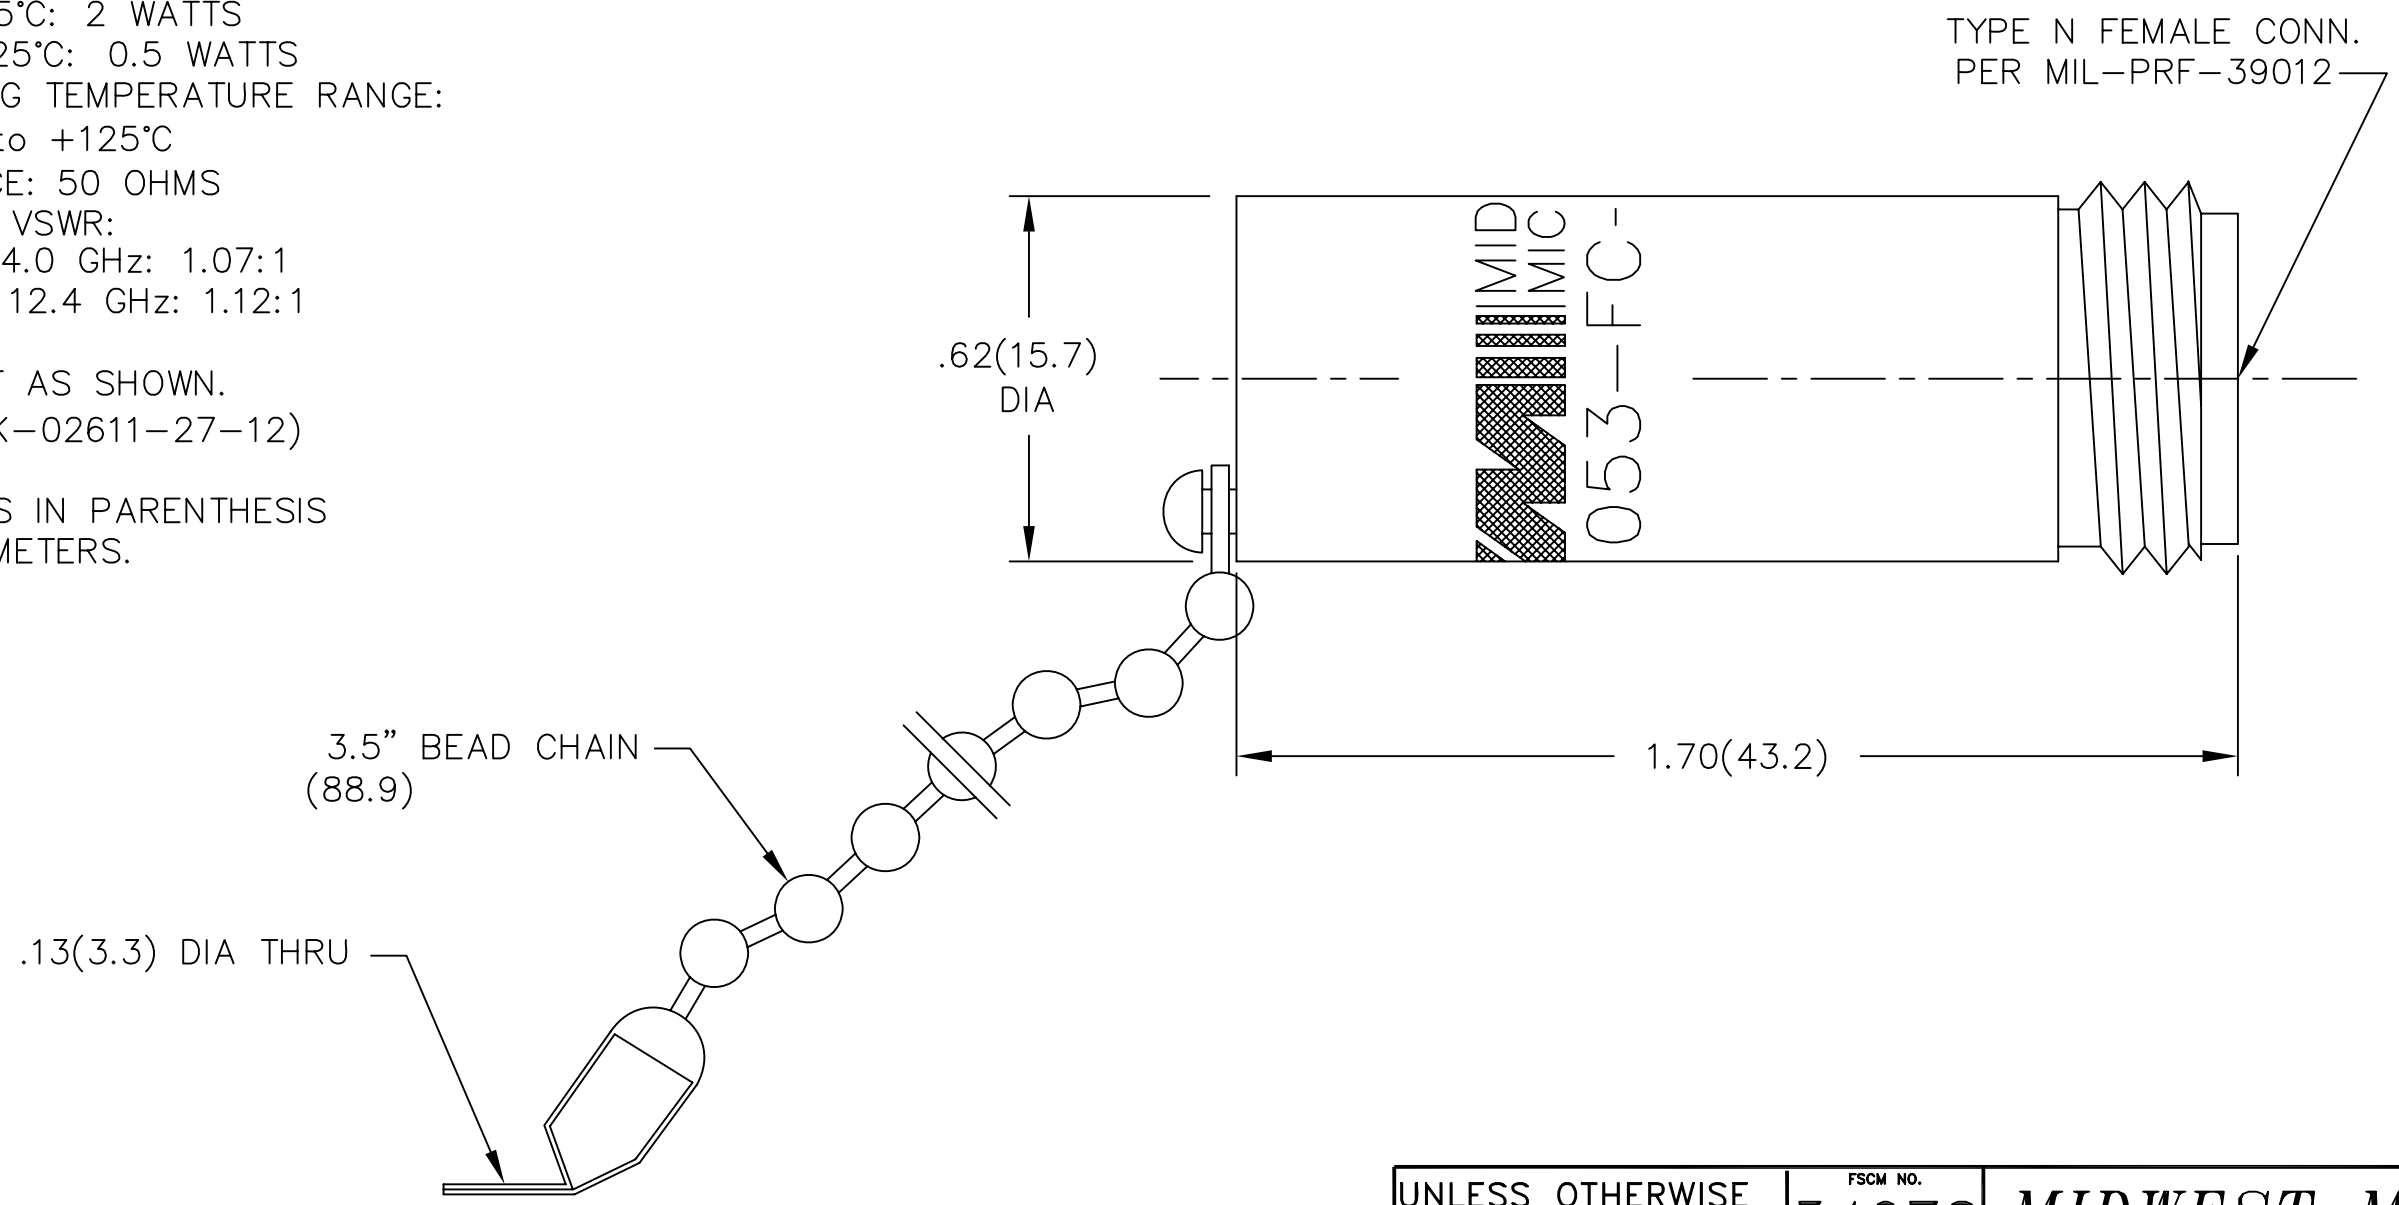

DATE	5/20/94	10/26/05
DESCRIPTION	RELEASED	ADDED TITLEBLOCK
REV.	-	-1

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION
DRAWN/DATE M.HOLLMAN 5/16/94	ENG./DATE G.KOZAK 5/19/94	DRAWING NUMBER TRM-2053-FC-NNN-02	
CHECKED/DATE A.BEATTY 5/18/94	APPROVED/DATE	SCALE: 3=1	SHEET 1 of 1